

STEERX

DRIVE YOUR WORKFLOW

HEAVY DUTY
HAND PALLET TRUCK



HAND PALLET TRUCK

Load Capacity: 2500kg / 3000kg

Easy Handling, Long-Lasting Quality

Smooth steering

High-quality, wear-resistant nylon and polyurethane wheels, with high load capacity, and smooth, effortless steering.

Starts smoothly with less push or pull

High-precision chassis with less starting force, easily handling loads of 2500 and 3000kg.

Controlled lifting and lowering

Rubber-coated handle, comfortable, non-slip grip and wear-resistant. Three lever control for easy operation. Standard with handle lever release and foot pedal release. Adjustable lowering speed. Handle lever automatically returns to neutral position after release.



Quality and Toughness

High-strength chassis with 100% robotic welding

Minimal welding deformation, high precision and consistency, guaranteed welding quality.

High-strength forks

Additional stiffeners on back of the forks for increased load capacity. Grooved forks, with a 400kg increase in static load capacity compared to flat forks.



Reinforced top cap

Additional support structures to increase strength and extend lifespan.



Adjustable push rod

If two forks are not balanced after one year use, push rod can be adjusted to make the forks back to same height.

Big opening space for load wheels

A big opening space for load wheels, offering enhanced protection for the wheels, push rod, and wheel forks.

Budget-Friendly

Single-piece cast pump designed for reliability, built tough, and simple to maintain

Removable piston guide cap, easy to maintain and repair. Over 200,000 times mechanical tests on working life. Annual volume over 500,000 pieces, reliable with no oil leakage. Removable small pump core design for easier repair and service. Thickened steel spring for stronger elasticity and longer working life.



Premium electrostatic powder coating finish

High level appearance with thick coating, strong adhesion, high corrosion resistance and wear resistance. Easy to use and easy to service. There is more to expect from Steerx, as we understand and respect customers' need for a product with excellent performance and lowest ownership cost.

Wheel Options

Multiple options suitable for different working conditions.



Nylon Wheels




PU Wheels



Rubber Wheels

Specifications

MODEL			SMPT-550H	SMPT-685H
1	Capacity	kg	2500/3000	2500/3000
2	Pump type		BF	BF
3	Wheels (drive/load) type		Nylon	Nylon
4	Size of steering wheel	ØD mm	180*50	180*50
5	Size of loading wheel(single wheel)	Ød mm	74*93	74*93
6	Size of loading wheel(double wheel)	Ød mm	74*70	74*70
7	Lifting height	h mm	120	120
8	Max. fork height	H mm	195	195
9	Min. fork height	H1 mm	75	75
10	Fork outer width	W mm	550	685
11	Fork length	L mm	1150	1220
12	Fork width	S mm	160	160
13	Steel thickness	mm	3	3.75
14	Weight	kg	61.5~68.5	71~78.5

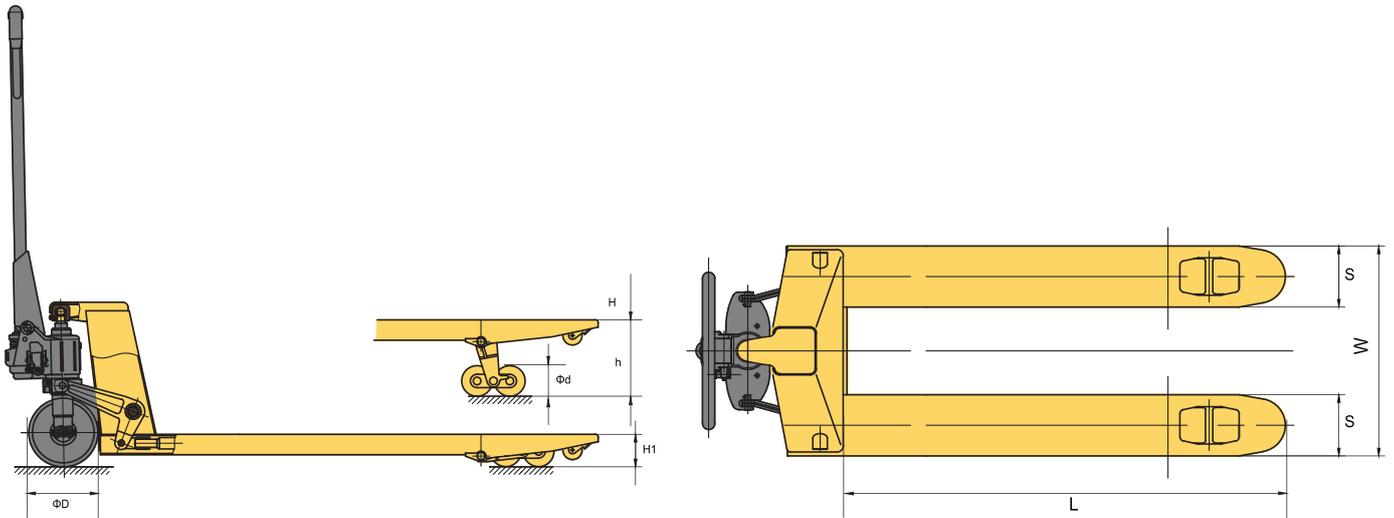

STEERX

DRIVE YOUR WORKFLOW



Effortless



Durable



Cost Effective



Outstanding Quality