



HEAVY DUTY HAND PALLET TRUCK



HAND PALLET TRUCK

Load Capacity: 5000kg

Easy Handling, Long-Lasting Quality

Heavy-Duty steel truck with overload protection

Reliable, sturdy, torsion-resistant due to its extremely strong high quality steel profile. Professional and ideal storage aid for all variety of manual transportation of short distances in stores and warehouse as well as factories. The lifting system is equipped with overloading protection valve to ensure safe operation. The utilized structural design guarantees the convenience of assembling and disassembling. Compact size, complete rocker arm, ensures that the whole truck is evenly pressed.

Quality and Toughness

Durable pallet truck with entry rollers & adjustable forks

Additional entry & exit roller guarantees easy entry and exit of closed pallet. Adjustable push rod can adjust fork to even level when forks are not balanced after long term use or incorrect use. 5mm fork steel thickness, robot welding and ensures durability.

Well-designed Handle with 3-Position Control for Safety and Comfort

Ergonomically designed handle with rubber grip allows the optimized safety as well as comfort. Three position operational handle lever for lifting, transporting and lowering purposes.



Robust hydraulic pump with precision lowering & overload protection

Well painted integrated cast hydraulic pump, robust and durable, with fine control of lowering speed, overload valve, and low maintenance rate.



Copper-bushed rocker arms

The 12 copper bushings at rocker arms and wheel frames protect axle holes, ensuring quiet running properties and particularly long service life.




High Load Capacity with Iron Wheels

Equipped with durable iron wheels for superior strength, excellent stability, and smooth, effortless steering even under maximum load.



Specifications

MODEL			SMPT50-550H	SMPT50-685H
1	Capacity	kg	5000	5000
2	Pump type		Intergrated	Intergrated
3	Wheels (drive/load) type		Iron	Iron
4	Size of steering wheel	ØD mm	200*50	200*50
5	Size of loading wheel(single wheel)	Ød mm	80*93	80*93
6	Size of loading wheel(double wheel)	Ød mm	80*75	80*75
7	Lifting height	h mm	110	110
8	Max. fork height	H mm	195	195
9	Min. fork height	H1 mm	85	85
10	Fork outer width	W mm	550	685
11	Fork length	L mm	1150	1220
12	Fork width	S mm	176	176
13	Steel thickness	mm	5	5
14	Weight	kg	101~110	101~110

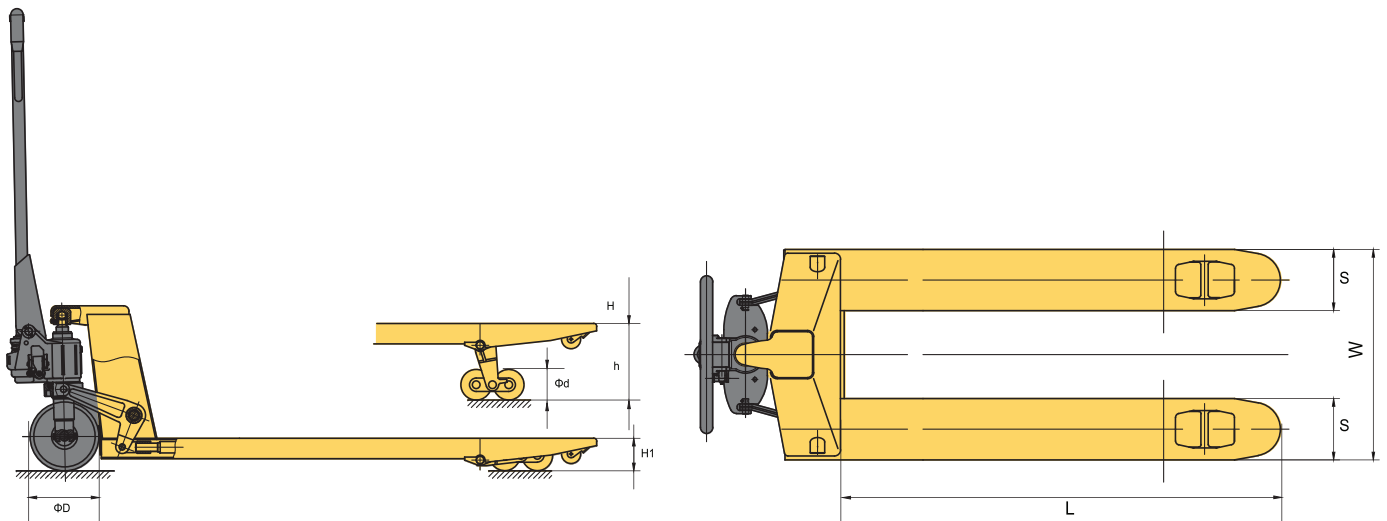

STEERX
DRIVE YOUR WORKFLOW



Effortless



Durable



Cost Effective



Outstanding Quality