

STEERX

DRIVE YOUR WORKFLOW

WEIGHING HAND PALLET TRUCK



WEIGHING HAND PALLET TRUCK

Load Capacity: 2500kg / 3000kg

Weigh it, Move it, Done

Integrated Digital Weighing System

The digital weighing pallet truck features an advanced electronic weighing system, enabling real-time and highly accurate measurement of pallet loads directly during transport. This eliminates the need for separate weighing stations, streamlining your warehouse operations and boosting efficiency.

Heavy-Duty Construction for Industrial Use

Built with reinforced, high-grade steel chassis and this weighing pallet truck offers robust durability and elite load-bearing performance for capacities up to 2500kg or 3000kg. The rugged design ensures reliable use in demanding industrial and commercial environments, making it perfect for warehouses, factories, and distribution centers.

Quality and Toughness

High precision multi-function LED screen

7 function keys, simple and convenient operation. 6-digit 32mm LED display, 7 state indicator lamps. Long service life and shock resistance. Automatic screen protection and automatic shutdown energy-saving function.

Tare / Hold / Accumulation(of pallet weight) / Counting mode / Unit switchable.

Accurate weighing up to 2500/3000kgs

Up to 2500kg or 3000kg, readings in kg or lb. 4 built-in load cells ensured accuracy. Accuracy $\pm 0.5\%$ (500g)



Battery-powered operations

Long-lasting rechargeable battery supports extended use, reducing downtime and maintenance costs for your business.


Rechargeable 6V/4Ah battery, 40 hrs operation.

Low maintenance requirements

Durable electronics and hardware minimize service intervals and support seamless day-to-day use.

Casted galvanized pump

Durable forks made from 4mm thickness steel.

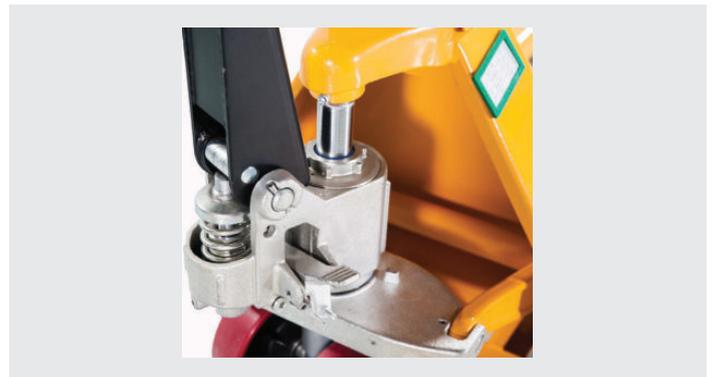

4 load cells inner weighing structure

Durable forks made from 4mm thickness steel.



Optional Configuration

Printer

Built-in printer with printing formats and communication protocol.


4Ah Lithium Battery and 8.4V/1A Charger

- 30 hours operation
- Lithium Battery Charger
- Charging time: 4 hours



Specifications

MODEL			SWPT25	SWPT30
1	Capacity	kg	2500	3000
2	Accuracy	gm	500	500
3	Pump type		Intergrated	Intergrated
4	Wheel Type		PU	PU
5	Size of steering wheel	ØD mm	180*50	180*50
6	Size of loading wheel(single wheel)	Ød mm	70*96	70*96
7	Size of loading wheel(double wheel)	Ød mm	70*70	70*70
8	Lifting height	H mm	120	120
9	Max. lifting height	h mm	198	198
10	Lowered height of fork	H1 mm	78	78
11	Fork outside distance	W mm	540	540
12	Fork length	L mm	1150	1150
13	Fork width	S mm	160	160
14	Battery Voltage	V/Ah	6/4	6/4
15	Weight	kg	96~109	96~109

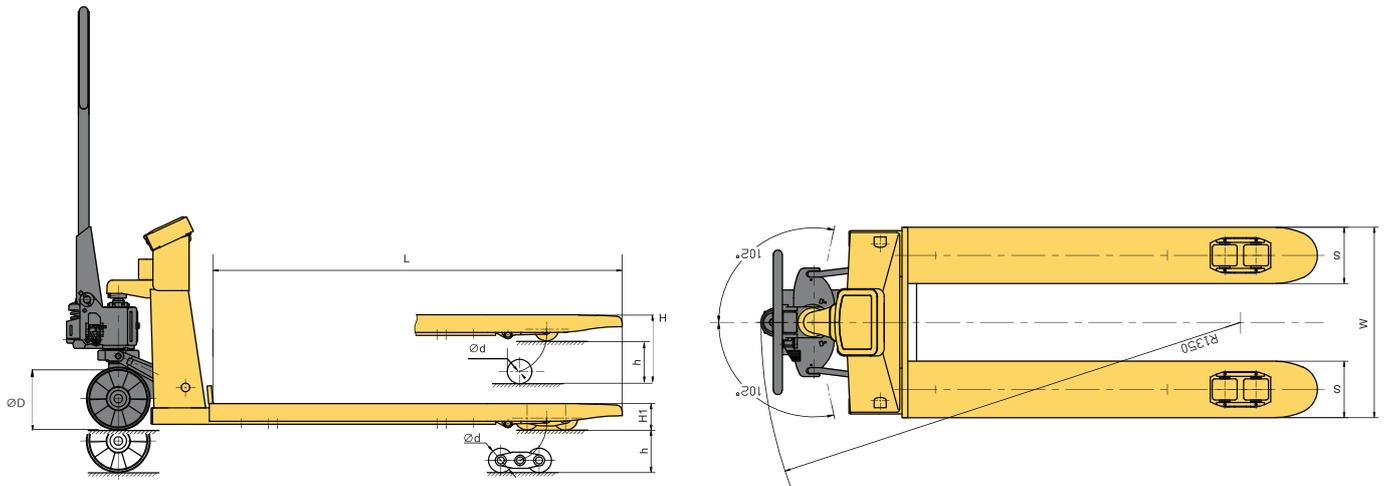

STEERX

DRIVE YOUR WORKFLOW



Effortless



Durable



Cost Effective



Outstanding Quality